



SPORTS | LEISURE

Regupol®

everroll® collection



**Regupol**  
(Australia) Pty. Ltd.

[www.regupol.com.au](http://www.regupol.com.au)

When Usain Bolt is training in Jamaica he is training on a Regupol® athletic track and when he is “working out” he is working out on our everroll® rubber flooring.

“I do my work out sessions on everroll®. The floor provides the right balance between firmness and elasticity.” Usain Bolt



### E-Books

In consideration of the environment please request electronic versions of Regupol literature. The only brochure available in print form is the everroll® collection brochure.

regupol® / re'gu'pol / noun.

1. recycled gummi polyurethane
2. ultimate recycled rubber flooring
3. over 50 years of environmental consciousness
4. the inventors of recycled rubber flooring
5. products fit for every application



Virgin Active, Frenchs Forest  
Treadmill Area

## Regupol®

A brand you can trust, Regupol® represents environmental flooring solutions.

## everroll®

The well known everroll® range represents our commercial, retail and sporting rubber flooring collection and the future in flooring.



Regupol (Australia) Pty Ltd is a company committed to broadening awareness to create environmentally responsible and healthy places to live and work.



Regupol® and everroll® branded products are manufactured under certified environmentally friendly policies and systems.



The everroll® collection of recycled rubber flooring products are environmentally preferable and meet the requirements of GECA 25-2005-Floor Coverings Standard.



Recycling has and will continue to play an important role in the world's environmental future. Regupol® and everroll® are brands recognised for their outstanding contribution in reducing the world's landfill by using recycled car tyres, post consumer rubber and cork materials.

## mycreation

everroll® mycreation offers countless opportunities to create your own individual flooring design. A choice of 25 selected EPDM colours are available to design with. Minimum quantities do apply.



Logo designs and inlays are a unique way to customise your floor and promote commercial brands, sporting and school logos.

## EVERROLL® BENEFITS

- Slip resistant
- Quiet underfoot
- Scratch resistant
- Stain resistant
- Anti-static
- Low maintenance
- Long service life
- Holds no dust
- GECA 25-2005 Floor Coverings
- Recycled
- Recyclable
- Economical
- Non-laminated

## EVERROLL® APPLICATIONS

- Sporting and fitness centres
- Aerobic rooms
- Circuit rooms
- Weight lifting areas
- Yoga and pilates studios
- Spin cycle studios
- Locker and change rooms
- Swimming pool surrounds
- Childrens activity rooms and creches
- Martial arts facilities
- Boxing ring surrounds
- Reception areas, entries and hallways
- Green Star Buildings
- Domestic Fitness
- Treadmill and cycle mats

everroll® classic brings high eco preferred content and extreme durability to our everroll® collection. Classic by design and yet so robust, it is used throughout the fitness and sporting industries. Available in our standard 4mm thickness as well as our 8mm heavy duty thickness, everroll® classic provides improved impact sound absorption, safety and comfort under foot.



everroll® classic Berlin \*\*



everroll® classic Goa \*\*



everroll® classic Mons \*\*




everroll® classic Palau \*\*





everroll® classic Sidon \*\*\*




everroll® classic Manaus \*\*


 Thickness 4mm, 8mm  
 Other thicknesses available  
 6mm, 10mm, 12mm  
 Lead times apply


 Roll Length  
 4mm 40Lm  
 6mm, 8mm 25Lm  
 10mm, 12mm 20Lm

 Roll Width  
 1.25m

Australian stocked lines  
 \* Stocked 4mm  
 \*\* Stocked 4mm & 8mm  
 \*\*\* Indent product  
 Tile format available as custom order

 Fire:  
 Average Critical Radiant Flux  
 3.23 KW/m<sup>2</sup>  
 ISO 9239 Part 1

 Slip:  
 AS/NZS 4586:1999 Class X, C and R10

 The everroll® collection of rubber flooring is made from recycled materials and slight variations in the EPDM colour chip dispersion or shading is normal.

Please note everroll® Mons (black) may contain traces of small white flecks.



Virgin Active, Melbourne  
Mind body area


everroll® star brings a unique aesthetic to the everroll® collection. High eco-content supported by bold chips of selected post consumer EPDM rubber, everroll® star can individualise any floor. Available in standard 4mm thickness, with other thicknesses available on request, this product offers simplicity and economy.



everroll® star Berlin \*






everroll® star Kush \*



everroll® star Nome \*\*\*



everroll® star Goa \*\*\*

-  Thickness 4mm, 8mm  
Other thicknesses available  
6mm, 10mm, 12mm  
Lead times apply
-  Roll Length  
4mm 40Lm  
6mm, 8mm 25Lm  
10mm, 12mm 20Lm
-  Roll Width  
1.25m

Australian stocked lines  
 \* Stocked 4mm  
 \*\* Stocked 4mm & 8mm  
 \*\*\* Indent product  
 Tile format available as custom order

-  Fire:  
Average Critical Radiant Flux  
2.73 kW/m<sup>2</sup>  
ISO 9239 Part 1
-  Slip:  
AS/NZS 4586:1999 Class X, C and R10
-  The everroll® collection of rubber flooring is made from recycled materials and slight variations in the EPDM colour chip dispersion or shading is normal.




"After having Regupol in our gym for seven years the new everroll® star material really gave our gym a great new look."

Richard Peil, Southern Cross Health Club

everroll® vision offers a point of difference by using all the attributes of everroll® classic with the creative combinations of selected post consumer EPDM rubber colour flecks. Available in standard 4mm thickness, with other thicknesses available on request, this product offers colour combinations to suit any modern interior.



everroll® vision Berlin \*




everroll® vision Kush \*






everroll® vision Nome \*\*\*



everroll® vision Goa \*\*\*

-  Thickness 4mm  
Other thicknesses available  
6mm, 8mm, 10mm, 12mm  
Lead times apply
-  Roll Length  
4mm 40Lm  
6mm, 8mm 25Lm  
10mm, 12mm 20Lm
-  Roll Width  
1.25m

Australian stocked lines  
\* Stocked 4mm  
\*\* Stocked 4mm & 8mm  
\*\*\* Indent product  
Tile format available as custom order

-  Fire:  
Average Critical Radiant Flux  
3.24 kW/m<sup>2</sup>  
ISO 9239 Part 1
-  Slip:  
AS/NZS 4586:1999 Class X, C and R10
-  The everroll® collection of rubber flooring is made from recycled materials and slight variations in the EPDM colour chip dispersion or shading is normal.



“Regupol products represent the new millennium in surfaces within the Australian Fitness Industry. I have had the opportunity to fit out three separate facilities with this outstanding product. These products represent clean, durable and unparalleled quality in surfacing.”

Jimmy Pappas, Shark Fitness Centre

everroll® endurance takes vision to the next level by offering a brighter aesthetic by increasing the volumes of post consumer EPDM rubber, whilst still maintaining high levels of eco preferred content. Available in standard 4mm thickness, with other thicknesses available on request, this product balances colour and value.



everroll® endurance Berlin \*






everroll® endurance Kush \*\*\*






everroll® endurance Nome \*



everroll® endurance Goa \*\*\*

-  Thickness 4mm  
Other thicknesses available  
6mm, 8mm, 10mm, 12mm  
Lead times apply
-  Roll Length  
4mm 40Lm  
6mm, 8mm 25Lm  
10mm, 12mm 20Lm
-  Roll Width  
1.25m
- Australian stocked lines  
\* Stocked 4mm  
\*\* Stocked 4mm & 8mm  
\*\*\* Indent product  
Tile format available as custom order

-  Fire:  
Average Critical Radiant Flux  
3.53 kW/m<sup>2</sup>  
ISO 9239 Part 1
-  Slip:  
AS/NZS 4586:1999 Class X, C and R10
-  The everroll® collection of rubber flooring is made from recycled materials and slight variations in the EPDM colour chip dispersion or shading is normal.



Our instructors are very excited about the new superior Composite "sprung" Flooring System in comparison to the traditional Sprung Timber Floor or any other classroom surfaces used in the past.  
Gavin Wilcox, Life Express

everroll® granite made from 100% EPDM rubber, takes the everroll® collection into a new realm of colour. With colour combinations selected by interior designers to suit current trends in commercial design. Available in 3mm thickness, this product offers a viable alternative to traditional resilient floor coverings and adds colour to any fitness facility. everroll® Granite is the most popular finish for the composite floor system in group fitness and yoga/pilates applications.



everroll® granite Berlin



everroll® granite Mons






everroll® granite Nome



everroll® granite Kush

-  Thickness 3mm
-  Roll Length 3mm 40Lm
-  Roll Width 1.25m

All everroll® granite colours are Australian stocked lines

-  Fire:  
Average Critical Radiant Flux  
6.4 kW/m<sup>2</sup>  
ISO 9239 Part 1
-  Slip:  
AS/NZS 4586:1999 Class Y, B and R10
-  The everroll® collection of rubber flooring is made from recycled materials and slight variations in the EPDM colour chip dispersion or shading is normal.



Virgin Active, Frenchs Forest  
Club V Childrens Area

everroll® stone introduces a finer EPDM rubber granule size to the everroll® collection, whilst maintaining individuality and a point of difference from the other products in the everroll® collection. Available in standard 4mm thickness, with other thicknesses available on request, this product can stand on its own and stand out when required, and is often used as a feature or to compliment the other products in the everroll® collection.



everroll® stone Berlin



everroll® stone Kush





everroll® stone Nome




everroll® stone Goa

-  Thickness  
4mm, 6mm, 8mm, 10mm, 12mm  
Lead times apply
-  Roll Length  
4mm 40Lm  
6mm, 8mm 25Lm  
10mm, 12mm 20Lm
-  Roll Width  
1.25m

All everroll® stone colours are indent products


-  Fire:  
Average Critical Radiant Flux  
6.4 kW/m<sup>2</sup>  
ISO 9239 Part 1
-  Slip:  
AS/NZS 4586:1999 Class Y, B and R10


The everroll® collection of rubber flooring is made from recycled materials and slight variations in the EPDM colour chip dispersion or shading is normal.

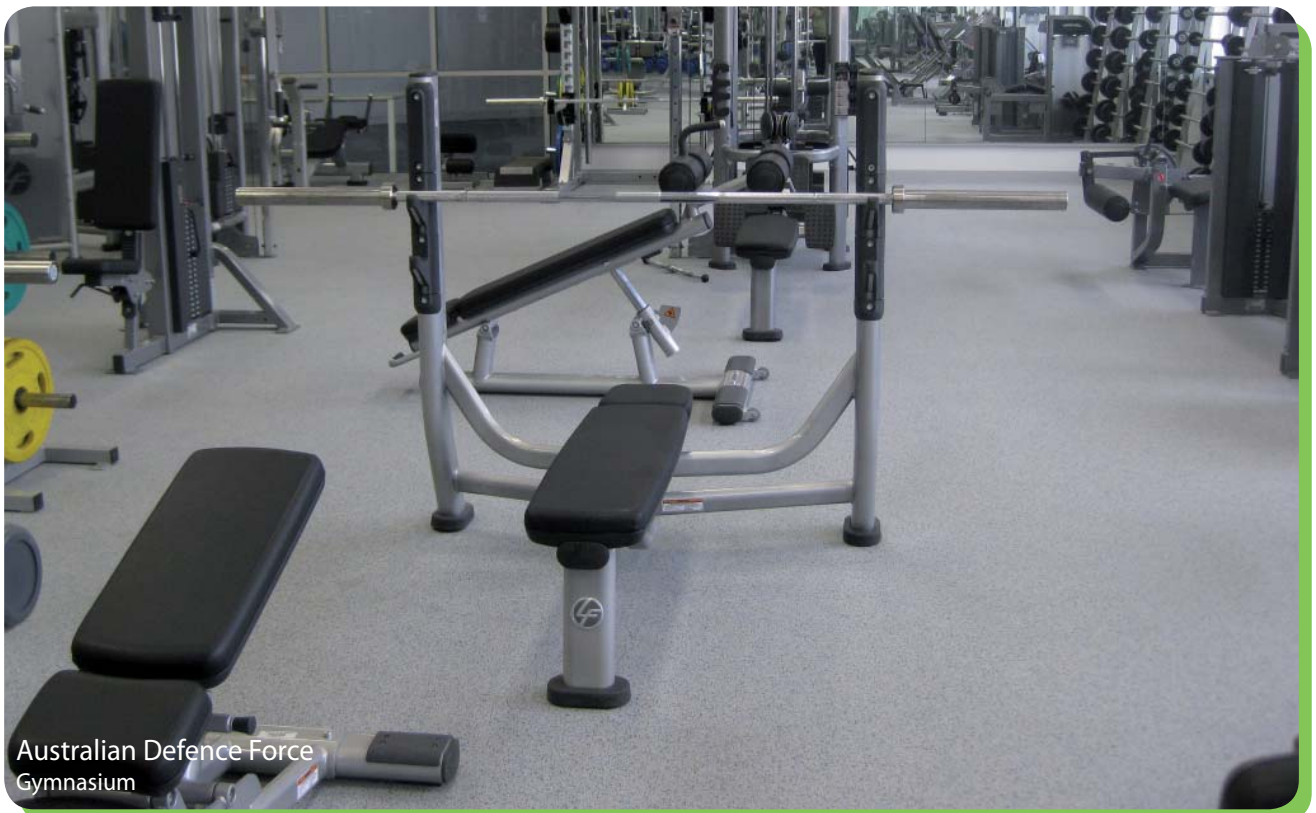


Australian Defence Force  
Gymnasium


everroll® uni offers uniformity in colour and design using the finest grade of post consumer EPDM rubber granules. Available in standard 4mm thickness, with other thicknesses available on request. This product offers boldness and can be coordinated with all of the products throughout the everroll® collection.


 Thickness  
4mm, 6mm, 8mm, 10mm, 12mm  
Lead times apply


 Roll Length  
4mm 40Lm  
6mm, 8mm 25Lm  
10mm, 12mm 20Lm

 Roll Width  
1.25m

All everroll® uni colours are indent products

 Fire:  
Average Critical Radiant Flux  
6.4 kW/m²  
ISO 9239 Part 1

 Slip:  
AS/NZS 4586:1999 Class Y, B and R10

 The everroll® collection of rubber flooring is made from recycled materials and slight variations in the EPDM colour chip dispersion or shading is normal.



everroll® uni Berlin




everroll® uni Kush



everroll® uni Mons



everroll® uni Palau



everroll® uni Nome




everroll® uni Goa



everroll® uni Manaus




everroll® uni Dublin

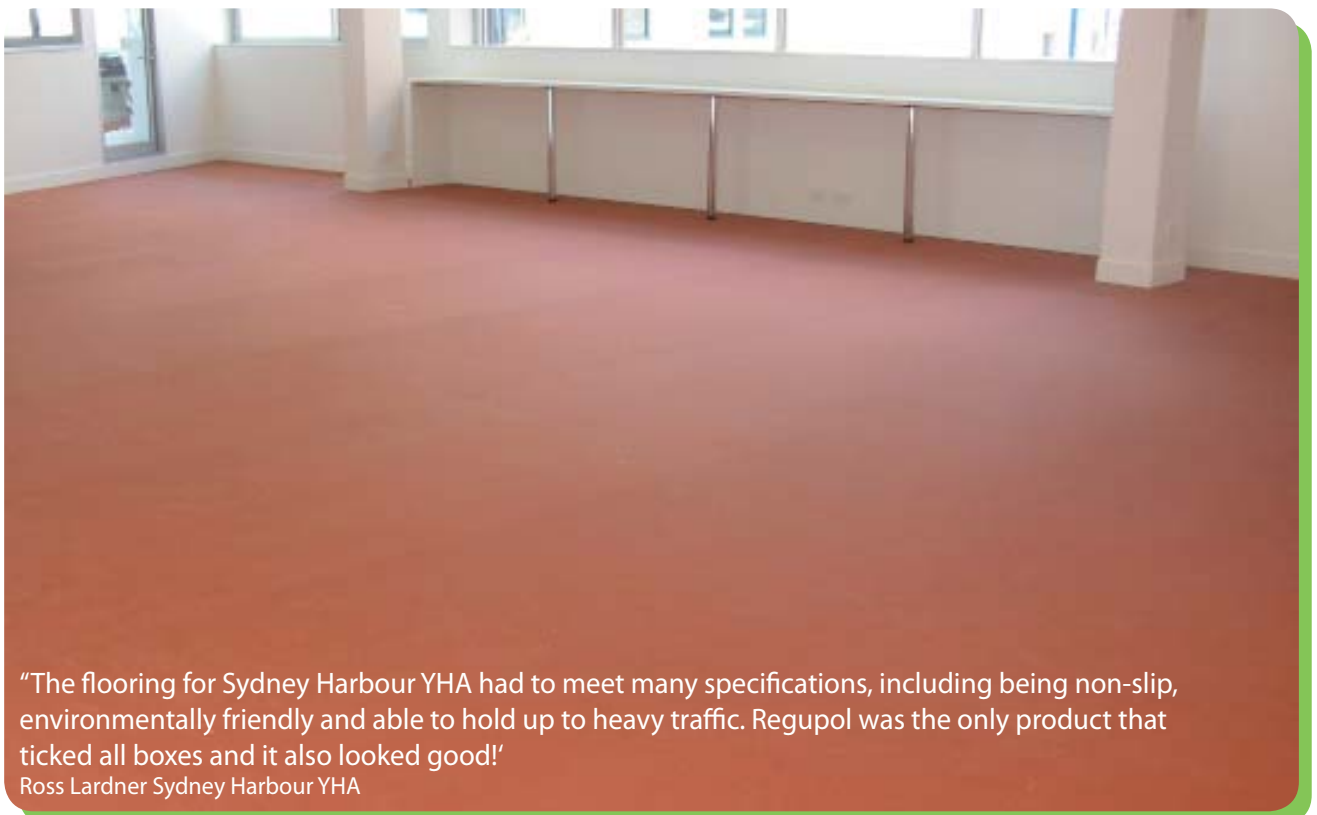

"The flooring for Sydney Harbour YHA had to meet many specifications, including being non-slip, environmentally friendly and able to hold up to heavy traffic. Regupol was the only product that ticked all boxes and it also looked good!"

Ross Lardner Sydney Harbour YHA

Impact absorption has to be the most important priority when selecting a floor for high impact fitness activities. The main point of difference between a traditional sprung timber floor and an everroll® composite floor is that a traditional sprung timber floor will only deflect in response to a large weight rebounding concurrently (area elastic deflection), whilst an everroll® composite floor offers individual deflection (point elastic deflection) for each patron according to their body mass.

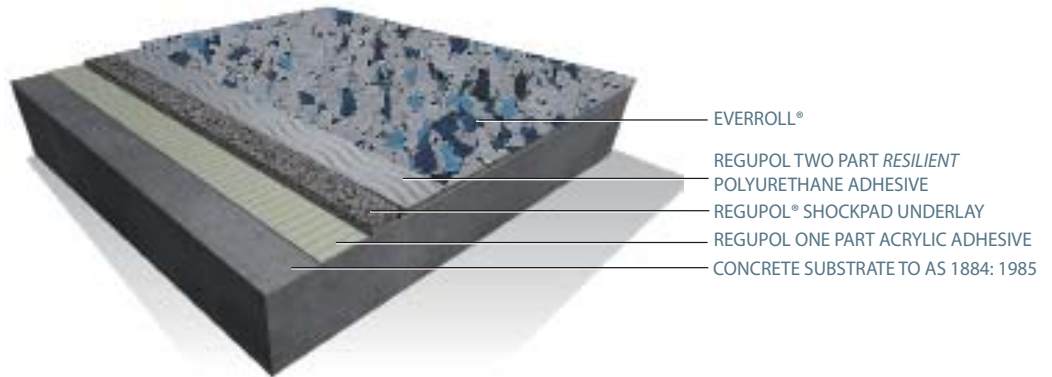


### FEATURES AND BENEFITS

- Point elastic deflection
- Good impact sound absorption
- Economical
- Low maintenance
- Short installation times
- Attractive finish options available

### APPLICATIONS

- Aerobics floor
- Circuit Rooms
- Yoga and Pilates studios
- All high impact fitness activities
- Martial Arts facilities
- Children's activity areas

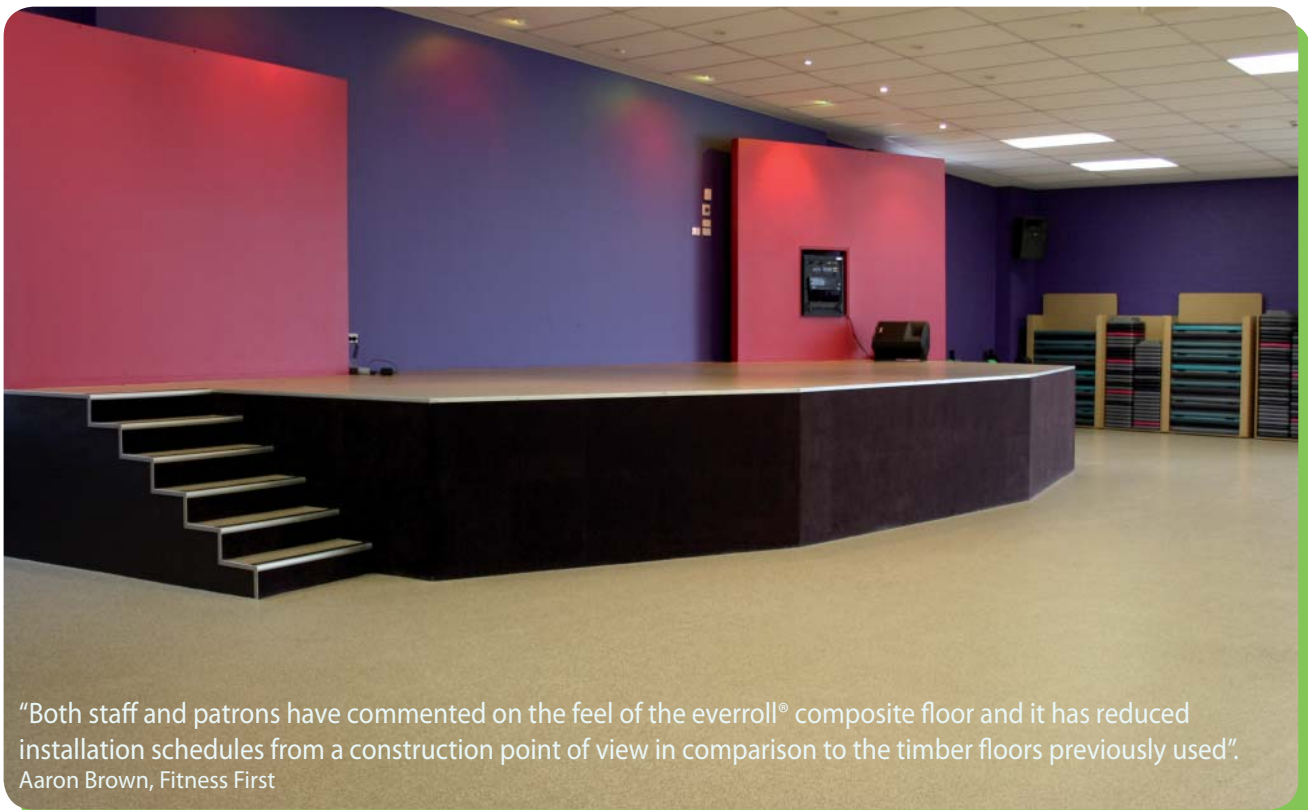

“Both staff and patrons have commented on the feel of the everroll® composite floor and it has reduced installation schedules from a construction point of view in comparison to the timber floors previously used”.


Aaron Brown, Fitness First

“One Size Fits All”. For many fitness facilities, 8mm everroll® classic has provided the right balance of comfort, performance and sure footedness to provide an all purpose economical, attractive and functional fitness flooring solution.

	everroll® classic 4mm	everroll® classic 8mm	everroll® star 4mm	everroll® vision 4mm	everroll® endurance 4mm	everroll® granite 3mm	everroll® stone 4mm	everroll® uni 4mm	Regupol® Pavers / Impact Plates	Martial Arts Mats	Composite Floors	Puzzle Pave
Free Weights Areas **		✓										
Pin Loaded Machine Areas	✓	✓	✓	✓	✓							
Cardio Rooms *	✓	✓	✓	✓	✓						✓	
Spin Studios ***	✓		✓	✓	✓		✓	✓				
Aerobics / High **** Impact Activities											✓	
Creche	✓		✓	✓	✓	✓	✓	✓			✓	
Home Gyms		✓	✓	✓	✓				✓	✓		✓
Swimming Pool Surrounds	✓		✓	✓	✓	✓	✓	✓				
Reception / Admin Areas	✓		✓	✓	✓	✓	✓	✓				
Change Rooms	✓		✓	✓	✓	✓	✓	✓				
Martial Arts Facilities	✓		✓	✓	✓	✓				✓	✓	
Indoor / Outdoor	✓ All products											
Powerlifting									✓			
Personal Trainers		✓							✓	✓		✓
Physio Gyms	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓

- \* Treadmill incline wheels may require additional support for 4mm product only
- \*\* Other everroll® products available in 8mm to order
- \*\*\* Sealer advised
- \*\*\*\* Sealer is optional to improve glide

Please note that these are general suggestions and specific applications should be discussed with the Regupol Rubber division staff or your commercial flooring contractor.



Whilst 8mm everroll® is suitable for free weights areas, Power lifting and strength and conditioning will often require the use of Regupol E Tile Pavers. Available in a number of thicknesses, Regupol's experienced staff can steer you to the most suitable paver product.

Regupol® pavers can often solve acoustic issues related to Heavy Weightlifting Applications.

Please note - Black tiles are recommended for fitness applications, Terracotta is a colouring applied to black rubber and is subject to fade and wear.



Black




Terracotta

**E Tile**  
 Thickness  
 15mm  
 22mm  
 43mm  
 Size  
 0.5m x 1m

**fx**  
 Thickness  
 50 mm  
 75mm  
 110mm  
 Size  
 0.5m x 1m

**Impact Tile**  
 Thickness  
 50m  
 Size  
 1m x 1m

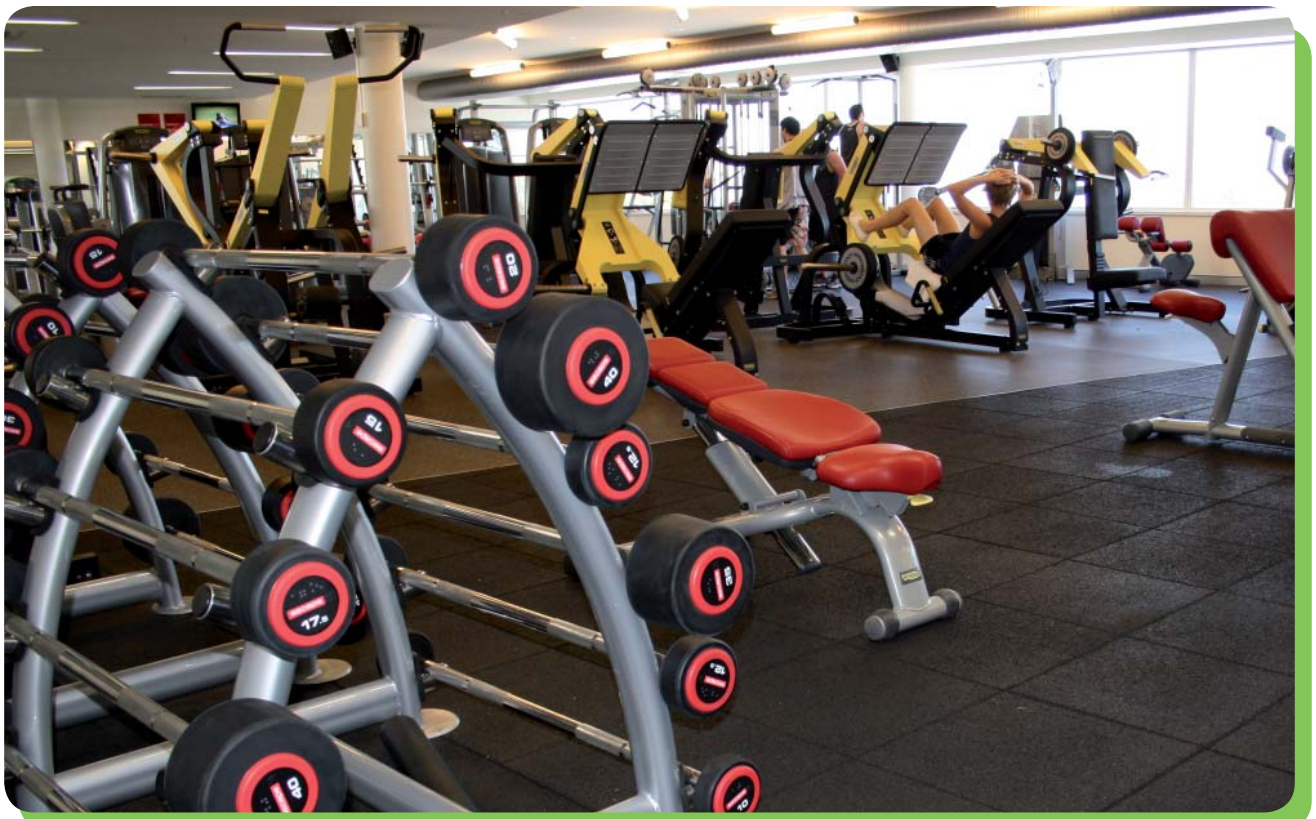

Regupol® is well known for our high quality Judo and Martial Arts Mats which meet the training and international competition standard. Since 1972 over one million mats have been sold worldwide. All our mats are made from a bonded foam core. They feature a waffle backing - developed to give improved anti-slip characteristics and abrasion values to prevent the use of joining tape or velcro.

**E215 Competition mats** - used for competition standards or where high density is required.

Measure: 2 metres x 1 metre x 40mm thick      Density: 240 kg/m<sup>3</sup>

**E200 Training mats** - used for training and childcare purposes.

Measure: 2 metres x 1 metre x 40mm thick      Density: 200 kg/m<sup>3</sup>

(other thicknesses and dimensions are available on request)



yellow



light green



green




red



dark blue



blue



grey



black



Purpose designed for home fitness and light duty fitness applications. Ideal for the mobile personal trainer to carry and high quality, durable training surface that can be installed in minutes.

**everroll® Puzzle Pave**

6mm thick, measuring 570 x 570 coverage jigsaw pattern, easy to install

**everroll® Tread Fit Mats**

8mm thick, measuring 1.25 metres in width and 2.5 metres long, suitable to protect all floor surfaces from the impact of treadmills.

**everroll® Spin Fit Mats**

4mm thick, measuring 1.25 metres in width and 1.25 metres long, adds stability to all cycling activities.



everroll® for home gyms



everroll® Puzzle Pave




everroll® Tread Fit mats



everroll® Spin Fit Mats

	Thickness 4mm, 6mm, 8mm, 10mm, 12mm Lead times apply
	Roll Length 4mm 40Lm 6mm, 8mm 25Lm 10mm, 12mm 20Lm
	Roll Width 1.25m
All everroll® stone colours are indent products	

	Fire: Average Critical Radiant Flux 6.4 kW/m <sup>2</sup> ISO 9239 Part 1
	Slip: AS/NZS 4586:1999 Class Y, B and R10
	The everroll® collection of rubber flooring is made from recycled materials and slight variations in the EPDM colour chip dispersion or shading is normal.

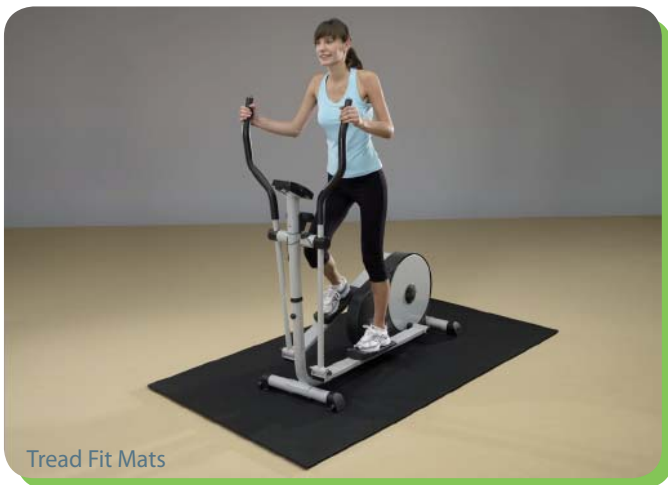

Tread Fit Mats




Spin Fit mats



GECA 25-2005 -  
Floor Coverings  
Standard

Lic: REG-2008  
geca.org.au



green building council australia  
MEMBER



**Regupol**  
(Australia) Pty. Ltd.

ABN 97 094 053 399

Unit 1, No. 5 Cary Grove  
MINTO NSW 2566

Ph: 02 9820 1233

Fax: 02 9820 1279

Email: [sales@regupol.com.au](mailto:sales@regupol.com.au)

Website: [www.regupol.com.au](http://www.regupol.com.au)