

aquatic | marine

Regupol®

everroll® collection



**Regupol**  
(Australia) Pty. Ltd.  
[www.regupol.com.au](http://www.regupol.com.au)

Welcome to Regupol,

We are both proud and excited to present to you our everroll® collection of environmentally responsible floor coverings.

The everroll® collection is a selection of our most sought after colours and material compositions used in today's commercial, retail and sporting sectors, with aquatic / marine applications being a continually growing sector for Regupol everroll® products.

Offering many benefits and attributes that are critical to an aquatic facility, the everroll® collection meets our community and global expectations for its social and environmental commitments, whilst maintaining its economically viable reputation.

On behalf of the Regupol team, thank you for this opportunity to present our products to you.

Nicholas Anasson  
General Manager

### E-Books

In consideration of the environment please request electronic versions of Regupol literature. The only brochure available in print form is the everroll® collection brochure.

### regupol® / re'gu'pol / noun.

1. recycled gummi polyurethane 2. ultimate recycled rubber flooring 3. over 50 years of environmental consciousness 4. the inventors of recycled rubber flooring 5. products fit for every application



Regupol®

A brand you can trust, Regupol® represents environmental flooring solutions.

everroll®

The well known everroll® range represents our commercial, retail and sporting rubber flooring collection and the future in flooring.



Regupol (Australia) Pty Ltd is a company committed to broadening awareness to create environmentally responsible and healthy places to live and work.



Regupol® and everroll® branded products are manufactured under certified environmentally friendly policies and systems.



everroll® products comply with GECA 25-2011 Floor Coverings Ecolabelling Standard which can be read at [www.geca.org.au](http://www.geca.org.au)

REG-2011  
GECA 25-2011-  
Floor Coverings



Recycling has and will continue to play an important role in the world's environmental future. Regupol® and everroll® are brands recognised for their outstanding contribution in reducing the world's landfill by using recycled car tyres, post consumer rubber and cork materials.



Logo designs and inlays are a unique way to customise your floor and promote commercial brands, sporting and school logos.

EVERROLL® BENEFITS


- Slip resistant
- Quiet underfoot
- Scratch resistant
- Stain resistant
- Anti-static
- Low maintenance
- Long service life
- Holds no dust
- GECA certified
- Recycled
- Recyclable
- Economical
- Non-laminated

EVERROLL® APPLICATIONS

- Swimming Pool Surrounds
- Sporting and fitness centres
- Changerooms & Bathrooms
- Spa Areas
- Hydrotherapy Pools
- Indoor & Outdoor areas
- Tiered Seating
- Theme parks
- Ice rink surrounds
- Reception areas, entries & hallways
- Canteen areas
- Marine and boating
- Wharves
- Children's activity pools
- Creches

By far the most popular product for aquatic and marine applications, everroll® granite offers excellent slip and UV resistance and the flexibility to fit any marine profile.

everroll® granite made from 100% EPDM rubber, takes the everroll® collection into a new realm of colour. With colour combinations selected by interior designers to suit current trends in commercial design with a strong focus on aquatic applications.



everroll® granite Berlin



everroll® granite Mons



everroll® granite Nome



everroll® granite Kush


-  Thickness 3mm
-  Roll Length 3mm 40Lm
-  Roll Width 1.25m

All everroll® granite colours are Australian stocked lines

-  Fire:  
Average Critical Radiant Flux  
6.4 kW/m<sup>2</sup>  
ISO 9239 Part 1
-  Slip:  
AS/NZS 4586:1999 Class Y, B and R10
-  The everroll® collection of rubber flooring is made from recycled materials and slight variations in the EPDM colour chip dispersion or shading is normal.



everroll® classic brings high eco preferred content and extreme durability to our everroll® collection. Classic by design and yet so robust, it is used throughout the sporting and commercial aquatic and marine industries. Available in our standard 4mm thickness as well as our 8mm heavy duty thickness, everroll® classic provides improved impact sound absorption, safety and comfort under foot.




everroll® classic Berlin \*\*



everroll® classic Goa \*\*



everroll® classic Mons \*\*




everroll® classic Palau \*\*





everroll® classic Sidon \*\*\*




everroll® classic Manaus \*\*


 Thickness 4mm, 8mm  
 Other thicknesses available  
 6mm, 10mm, 12mm  
 Lead times apply


 Roll Length  
 4mm 40Lm  
 6mm, 8mm 25Lm  
 10mm, 12mm 20Lm

 Roll Width  
 1.25m


Australian stocked lines  
 \* Stocked 4mm  
 \*\* Stocked 4mm & 8mm  
 \*\*\* In-plant product  
 Tile format available as custom order

 Fire:  
 Average Critical Radiant Flux  
 3.23 kW/m<sup>2</sup>  
 ISO 9239 Part 1

 Slip:  
 AS/NZS 4586:1999 Class X, C and R10

 The everroll® collection of rubber flooring is made from recycled materials and slight variations in the EPDM colour chip dispersion or shading is normal.

Please note everroll® Mons (black) may contain traces of small white flecks.

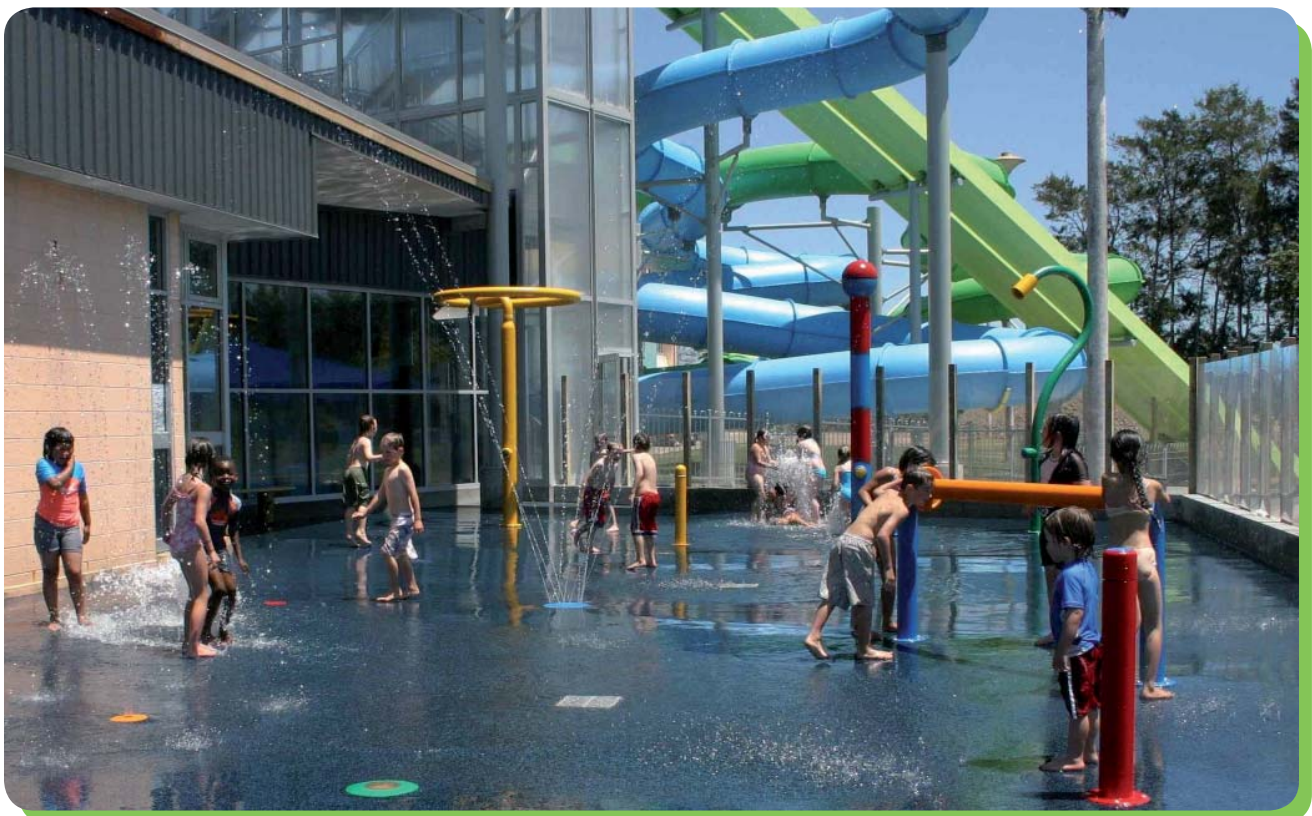


everroll® star brings a unique aesthetic to the everroll® collection. High eco content supported by bold chips of selected post consumer EPDM rubber, everroll® star can individualise any floor. Available in standard 4mm thickness, with other thicknesses available on request, this product offers simplicity and economy.



everroll® star Berlin \*






everroll® star Kush \*



everroll® star Nome \*\*\*



everroll® star Goa \*\*\*

-  Thickness 4mm, 8mm  
Other thicknesses available  
6mm, 10mm, 12mm  
Lead times apply
-  Roll Length  
4mm 40Lm  
6mm, 8mm 25Lm  
10mm, 12mm 20Lm
-  Roll Width  
1.25m

Australian stocked lines  
\* Stocked 4mm  
\*\* Stocked 4mm & 8mm  
\*\*\* Indent product  
Tile format available as custom order

-  Fire:  
Average Critical Radiant Flux  
2.73 kW/m<sup>2</sup>  
ISO 9239 Part 1
-  Slip:  
AS/NZS 4586:1999 Class X, C and R10
-  The everroll® collection of rubber flooring is made from recycled materials and slight variations in the EPDM colour chip dispersion or shading is normal.



everroll® vision offers a point of difference by using all the attributes of everroll® classic with the creative combinations of selected post consumer EPDM rubber colour flecks. Available in standard 4mm thickness, with other thicknesses available on request, this product offers colour combinations to suit any aquatic or marine surface.



everroll® vision Berlin \*




everroll® vision Kush \*





everroll® vision Nome \*\*\*




everroll® vision Goa \*\*\*


 Thickness 4mm  
 Other thicknesses available  
 6mm, 8mm, 10mm, 12mm  
 Lead times apply


 Roll Length  
 4mm 40Lm  
 6mm, 8mm 25Lm  
 10mm, 12mm 20Lm

 Roll Width  
 1.25m

Australian stocked lines  
 \* Stocked 4mm  
 \*\* Stocked 4mm & 8mm  
 \*\*\* Indent product  
 Tile format available as custom order

 Fire:  
 Average Critical Radiant Flux  
 3.24 kW/m<sup>2</sup>  
 ISO 9239 Part 1

 Slip:  
 AS/NZS 4586:1999 Class X, C and R10

 The everroll® collection of rubber flooring is made from recycled materials and slight variations in the EPDM colour chip dispersion or shading is normal.



everroll® endurance takes vision to the next level by offering a brighter aesthetic by increasing the volumes of post consumer EPDM rubber, whilst still maintaining high levels of eco preferred content. Available in standard 4mm thickness, with other thicknesses available on request, this product balances colour and value.



everroll® endurance Berlin \*



everroll® endurance Kush \*\*\*




everroll® endurance Nome \*



everroll® endurance Goa \*\*\*

-  Thickness 4mm  
Other thicknesses available  
6mm, 8mm, 10mm, 12mm  
Lead times apply
-  Roll Length  
4mm 40Lm  
6mm, 8mm 25Lm  
10mm, 12mm 20Lm
-  Roll Width  
1.25m

Australian stocked lines  
\* Stocked 4mm  
\*\* Stocked 4mm & 8mm  
\*\*\* Indent product  
Tile format available as custom order

-  Fire:  
Average Critical Radiant Flux  
3.53 kW/m<sup>2</sup>  
ISO 9239 Part 1
-  Slip:  
AS/NZS 4586:1999 Class X, C and R10
-  The everroll® collection of rubber flooring is made from recycled materials and slight variations in the EPDM colour chip dispersion or shading is normal.



everroll® stone introduces a finer EPDM rubber granule size to the everroll® collection, whilst maintaining an individuality unlike any other. Available in standard 4mm thickness, with other thicknesses available on request, this product can stand on its own and stand out when required.



everroll® stone Berlin



everroll® stone Kush



everroll® stone Nome



everroll® stone Goa

-  Thickness  
4mm, 6mm, 8mm, 10mm, 12mm  
Lead times apply
-  Roll Length  
4mm 40Lm  
6mm, 8mm 25Lm  
10mm, 12mm 20Lm
-  Roll Width  
1.25m

All everroll® stone colours are indent products

-  Fire:  
Average Critical Radiant Flux  
6.4 kW/m<sup>2</sup>  
ISO 9239 Part 1
-  Slip:  
AS/NZS 4586:1999 Class Y, B and R10
-  The everroll® collection of rubber flooring is made from recycled materials and slight variations in the EPDM colour chip dispersion or shading is normal.



“Public safety and risk management is high priority in wet areas... everroll® stone meets the slip and fire requirements for community infrastructure.”  
Owen Walsh, ABS Group Systems

everroll® uni represents uniformity in colour and design using the finest grade of post consumer EPDM rubber granules.

Available in standard 4mm thickness, with other thicknesses available on request.

This product offers boldness and can be coordinated with all of the products throughout the everroll® collection.



everroll® uni Berlin




everroll® uni Kush



everroll® uni Mons




everroll® uni Palau



everroll® uni Nome




everroll® uni Goa





everroll® uni Manaus



everroll® uni Dublin

 Thickness  
4mm, 6mm, 8mm, 10mm, 12mm  
Lead times apply

 Roll Length  
4mm 40Lm  
6mm, 8mm 25Lm  
10mm, 12mm 20Lm

 Roll Width  
1.25m

All everroll® uni colours are indent products

 Fire:  
Average Critical Radiant Flux  
6.4 kW/m<sup>2</sup>  
ISO 9239 Part 1


 Slip:  
AS/NZS 4586:1999 Class Y, B and R10

 The everroll® collection of rubber flooring is made from recycled materials and slight variations in the EPDM colour chip dispersion or shading is normal.





Please request full pool / marine installation specification from Regupol (Australia) Pty Ltd.

### Swimming pool

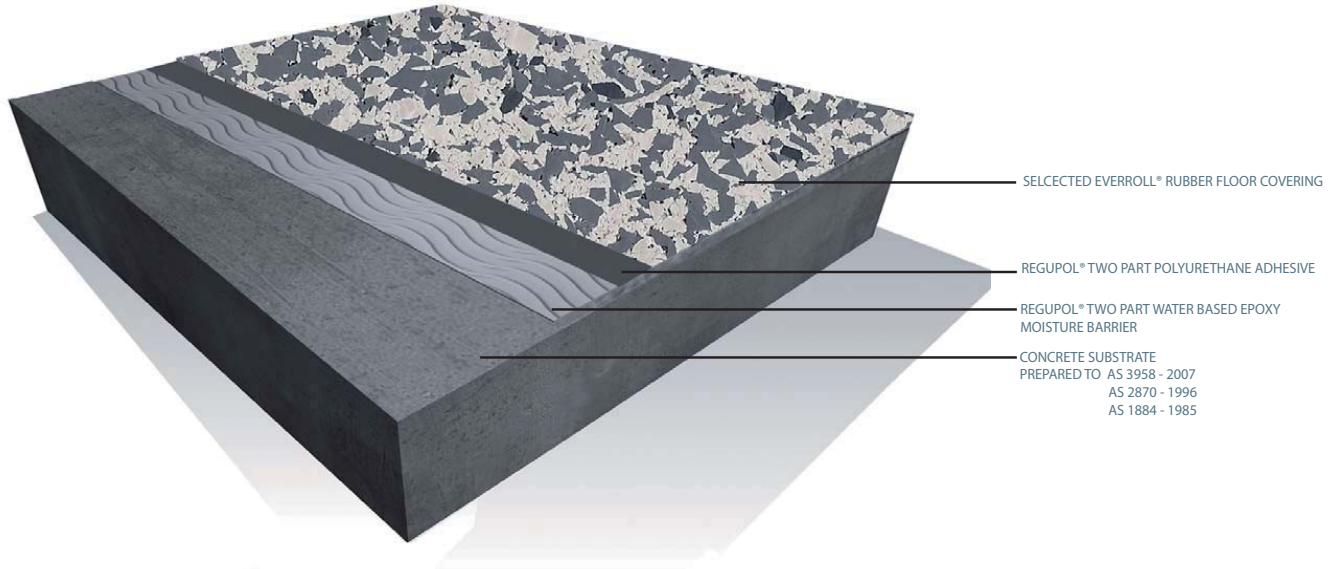

### Marine

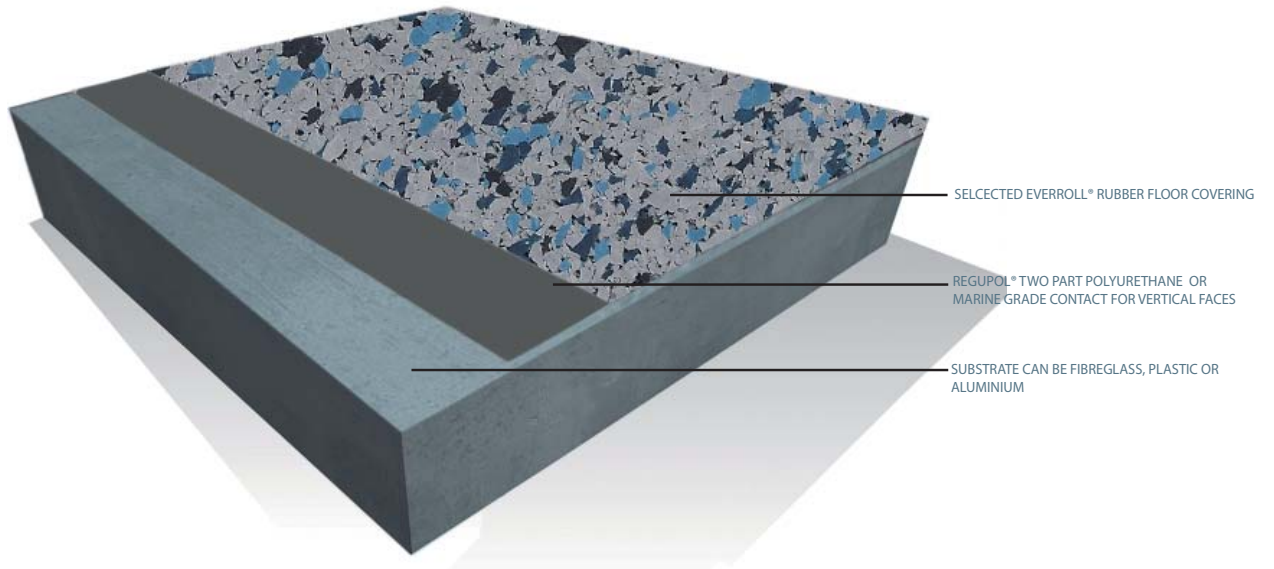



green building council australia  
MEMBER



**Regupol**  
(Australia) Pty. Ltd.

ABN 97 094 053 399

Unit 1, No. 5 Cary Grove  
MINTO NSW 2566  
Ph: 02 9820 1233  
Fax: 02 9820 1279  
Email: [sales@regupol.com.au](mailto:sales@regupol.com.au)  
Website: [www.regupol.com.au](http://www.regupol.com.au)

July 2011